



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	2.54mm PIN HEADER, V/A, T/H	PHS02V-XX070-0092

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.10.15

- SPECIFICATION
- CURRENT RATING : 3 Amp MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE : AC 500V
 - INSULATION RESISTANCE: 1000MQ MIN.
 - OPERATING TEMPERATURE : -40° C TO +105° C

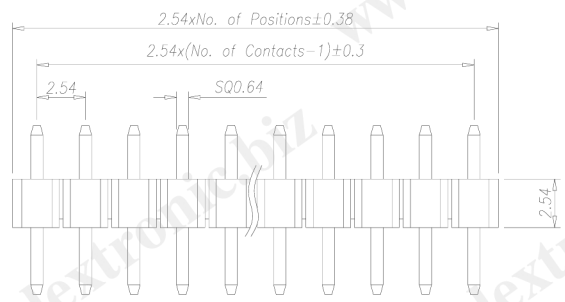

PART NO.:
PHS02V-XX070-0092
Terminal Q'TY: 01~40



Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

See PART NO.

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
b	Terminal	XX	Brass, SQ0.64mm	Gold Flash Plating	
a	Housing	1	PBT UL94V-0	Black	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm	DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE: 1 OF 1	REV: A01
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1'			
X.XX : ±0.2				
APPROVED BY	CHECKED BY	PREPARED BY		
WYX	Pengjie	Luguan		
CUSTOMER COPY				

Product Drawing
ALEXTRONIC

WI-061-717