



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SLIM D-SUB 15P plus 2.50 mm Reverse	DBB15F-1CRXX-XXXX





△A01 料號由DBB15F-1CRL0-BXXX變更為DBB15F-1CRLX-BXXX
 △A03 料號由DBB15F-1CRLX-BXXX變更為DBB15F-1CRXX-XXXX



△A01 Date Code
 YY:YEAR(09~)
 MM:MONTH(01~12)
 DD:DAY(01~31)

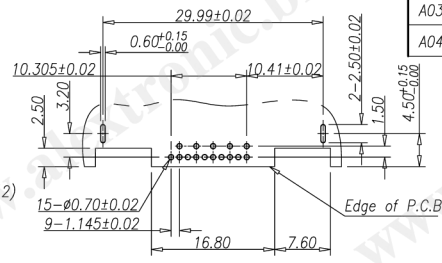

Recommend PCB Layout
 PCB Thickness:1.20mm.
 PCB Layout Tolerance:±0.05mm.

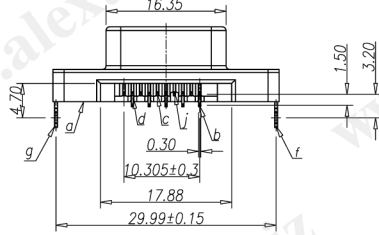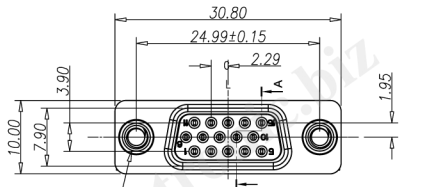

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A03	ECN091110002	新增塑膠材質及顏色,變更料號	Luguan	2009.11.10
A04		增加包裝規格	Luguan	2009.12.22

SPECIFICATIONS

- CONTACT CURRENT RATING:3 Amperes.
- DIELECTRIC WITHSTANDING VOLTAGE:AC 1000/60sec.r.m.s.
- INSULATION RESISTANCE:5000 Medohms MIN.AT DC 500V.
- CONTACT RESISTANCE:25 milliohms MAX.
- TEMPERATURE:-55°C TO +105°C.
- GROUNDING SCREW TORQUE:3kg MIN.
- SOLDER HEAT RESISTANCE:WAVE SOLDERING 260" 10sec.
- TO CONFORM TO THE "SONY" DIRECTIVE.
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**

Table 2		DBB15F-1CRXX-XXXX		Table 3	
X	Housing Material	X	SCREW ATTACH WAY	X	Housing Color
L	LCP UL94V-0	1	WITHOUT SCREW,RIVET With pb/cd≤4wt%	B	Black
6	PA6T UL94V-0	2	ATTACH SCREW,RIVET SCREW With pb/cd≤4wt%	L	Blue
X	Date Code	3	LOCK SCREW,RIVET SCREW With pb/cd≤4wt%		
0	Without	4	WITHOUT SCREW,RIVET With pb/cd≤0.2wt%		
1	With	5	ATTACH SCREW,RIVET SCREW With pb/cd≤0.2wt%		
		6	LOCK SCREW,RIVET SCREW With pb/cd≤0.2wt%		
				X	PACKAGE Way
				R	REEL PACKAGE
				T	TRAY PACKAGE
				B	TUBE PACKAGE

k	Ink	1	Domino IR-270BK & MC-270BK	Black	
j	9th pin CONTACT	1	Phoshor Bronze,T=0.3mm	See Table 1	
i	SCREW	2	Copper Alloy	Ni Plating	
h	SLIM RIVET	2	Copper Alloy	Ni Plating	
g	SLIM LEFT BOARD LOCK	1	Brass,T=0.3mm	Tin Plating	
f	SLIM RIGHT BOARD LOCK	1	Brass,T=0.3mm	Tin Plating	
e	SLIM SHELL	1	SPCC,T=0.4mm	Ni Plating	
d	SLIM SHORT CONTACT	5	Phoshor Bronze,T=0.3mm	See Table 1	
c	SLIM CENTER CONTACT	4	Phoshor Bronze,T=0.3mm	See Table 1	
b	SLIM LONG CONTACT	5	Phoshor Bronze,T=0.3mm	See Table 1	
a	SLIM CORRECT HOUSING	1	See Table 2	See Table 3	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE:1 OF 1	REV:A04
X :±0.5	X :±2°			WI-061-638
X.X :±0.3	X.X :±1°	APPROVED BY	CHECKED BY	PREPARED BY
X.XX :±0.2		WYX	Pengjie	Luguan
CUSTOMER COPY				

Product Drawing
ALEXTRONIC