



| CATEGORY | DESCRIPTION | P/N # |
|-----------|-----------------------------|-------------------|
| CONNECTOR | 2.54mm PIN HEADER, V/A, T/H | PHS01V-XX070-0091 |

| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|------------|
| A01 | | New Release | Luguan | 2009.08.13 |

- SPECIFICATION
- CURRENT RATING : 3 Amp MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE : AC 500V
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATING TEMPERATURE : -40° C TO +105° C



PART NO.:
PHS01V-XX070-0091
Terminal Q'TY: 02~40

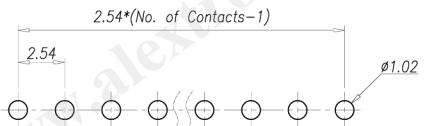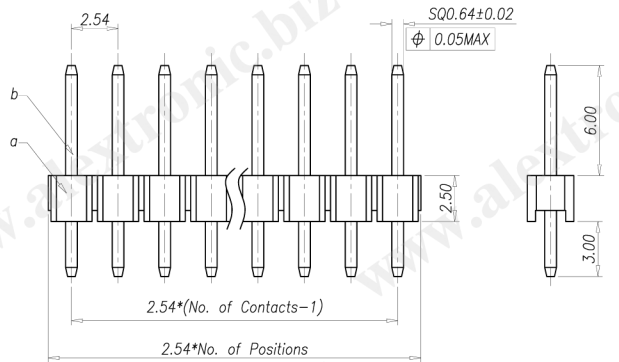

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

See PART NO.

| NO. | PART NAME | Q'TY | MATERIAL | PLATING & COLOR | Remark |
|-----|-----------|------|-----------------|--------------------|--------|
| b | Terminal | XX | Brass, SQ0.64mm | Gold Flash Plating | |
| a | Housing | 1 | PA UL94V-0 | Black | |

| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | | SCALE:1/1 | UNIT: mm | ⊕ ⊖ | DWG.NO: |
|---------------------------------------|--|----------|--|---------------|-------------|------------|------------|
| | | | | SIZE: A3 | PAGE:1 OF 1 | REV:A01 | WI-061-657 |
| DECIMALS: | | ANGLES: | | APPROVED BY | | CHECKED BY | |
| X :±0.5 | | X :±2° | | WYX | | Pengjie | |
| X.X :±0.3 | | X.X :±1° | | | | Luguan | |
| X.XX :±0.2 | | | | CUSTOMER COPY | | | |

Product Drawing
ALEXTRONIC