

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	2.54mm PIN HEADER, V/A, T/H	PHW30V-XX070-0091

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.07.28




**SPECIFICATION**

- CURRENT RATING : 3 Amp MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : AC 500V
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE : -40° C TO +105° C

PART NO.:

PHW30V-XX070-0091

Terminal Q'TY: 04~80

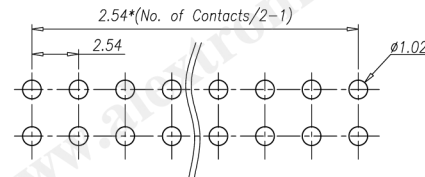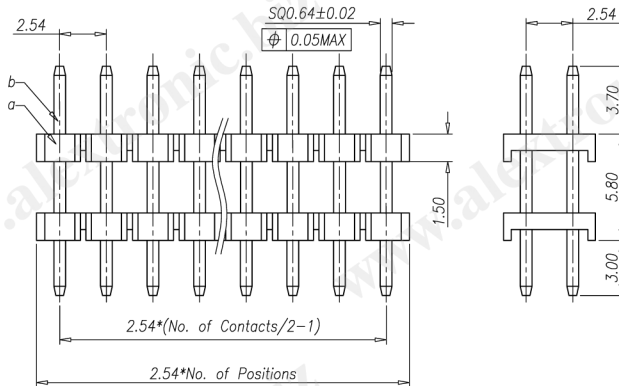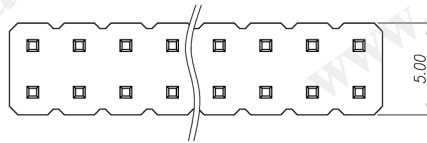

Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm  
Recommend PCB Thickness: 1.6mm

See PART NO.

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
b	Terminal	XX	Brass, SQ0.64mm	Gold Flash Plating	
a	Housing	2	PA UL94V-0	Black	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm		DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE: 1 OF 1	REV: A01	WI-061-586
X : ±0.5	X : ±2°	APPROVED BY		CHECKED BY	PREPARED BY
X.X : ±0.3	X.X : ±1°	WYX		Pengjie	Luguan
X.XX : ±0.2		<b>CUSTOMER COPY</b>			