

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	2.54mm PIN HEADER, V/A, T/H	PHY30V-XX070-0091

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.07.28

**SPECIFICATION**



- CURRENT RATING : 3 Amp MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : AC 500V
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE : -40° C TO +105° C



PART NO.:

PHY30V-XX070-0091

Terminal Q'TY: 02~40

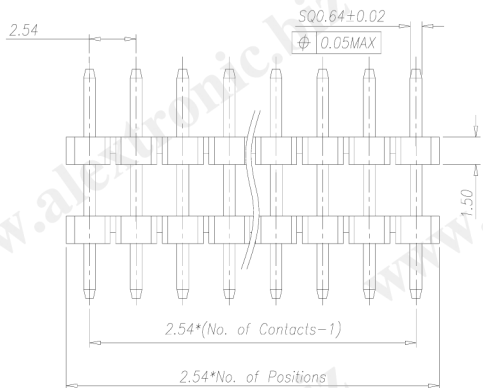

Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm  
Recommend PCB Thickness: 1.6mm

See PART NO.

b	Terminal	XX	Brass, SQ0.64mm	Gold Flash Plating	
a	Housing	2	PA UL94V-0	Black	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2

ANGLES: X :±2° X.X :±1°

Product Drawing ALEXTRONIC			SCALE: 1/1	UNIT: mm	DWG. NO:
			SIZE: A3	PAGE: 1 OF 1	REV: A01
APPROVED BY		CHECKED BY		PREPARED BY	
WYX		Pengjie		Luguan	
<b>CUSTOMER COPY</b>					

WI-061-587