
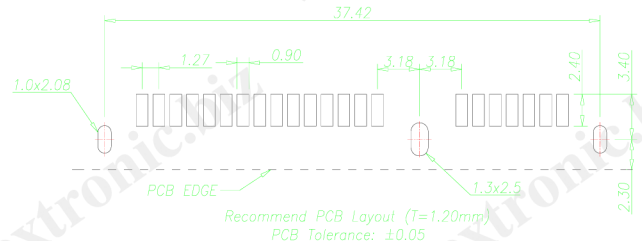
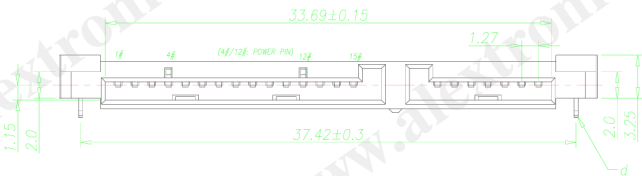



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SATA 7+15P 90° Female SMI Type H3.25	SA3254-22F10-001C

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		New View	XSY	2009.05.19

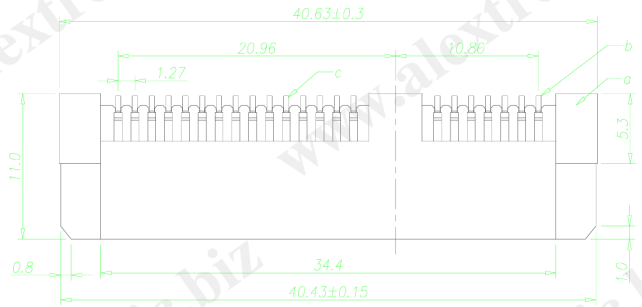

SPECIFICATIONS:

- Electrical Characteristics
- 1-1: Voltage: 15V DC
 - 1-2: Current Rating: 1.5A
 - 1-3: Contact Resistance: 30mΩ MAX.
 - 1-4: Insulation Resistance: 1000MΩ MIN.
 - 1-5: Dielectric Withstang Voltage : 500V AC
 - 1-6: Operature Temperature: -35°C~85°C



**Product Drawing
ALETRONIC**

NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark
d	PEG	2	Brass, T=0.3mm	CuSn Plating	
c	Long Terminal	15	Phosphor Bronze T=0.25mm	Au/Tin Plating	
b	Short Terminal	7	Phosphor Bronze T=0.25mm	Au/Tin Plating	
a	Housing	1	LCP UL94V-0	Black	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1 UNIT: mm	⊕ ⊖ DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3 PAGE: 1 OF 1	REV: R01 WI-061-465
X : ±0.5	X : ±1°	APPROVED BY	CHECKED BY
X.X : ±0.3	X.X : ±0.5°	WYX	PJ
X.XX : ±0.2			PREPARED BY XSY
CUSTOMER COPY			