
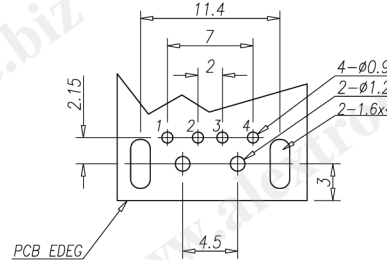
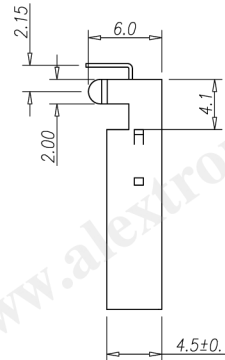
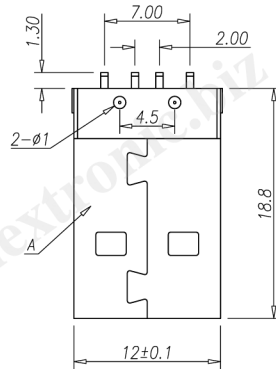


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	USB A TYPE (MALE) 4P DIP	UB1041-11M10-0010

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		New Release	Luguan	2009.02.12

Specifications:


1. Rated Current: 1.5A
2. Contact resistance: 30mΩ MAX.
3. Insulation resistance: 1000MΩ MIN.
4. Dielectric withstand: 500V AC for 1 minute
5. Operating temperature: -55°C~+85°C
6. Insert force: 35N MAX.
7. Withdraw force: 10N MIN.



Recommend PCB Layout
(Jack Top View)

Tolerance: ±0.05mm

Recommend PCB Thickness: 1.6mm



PROPOSAL ONLY

C	Terminal	4	Brass	Gold Flash Plating	
B	Housing	1	PBT UL94V-0	Black	
A	Shell	1	Spcc	Ni Plating	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

Product Drawing
ALEXTRONIC

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm	⊕ ⊖	DWG.NO:
		SIZE: A3	PAGE: 1 OF 1	REV: A1	
DECIMALS: X : ±0.5 X.X : ±0.3 X.XX : ±0.2		ANGLES: X : ±2' X.X : ±1'		APPROVED BY	CHECKED BY
		WYX		Pengjie	Luguan
				CUSTOMER COPY	