
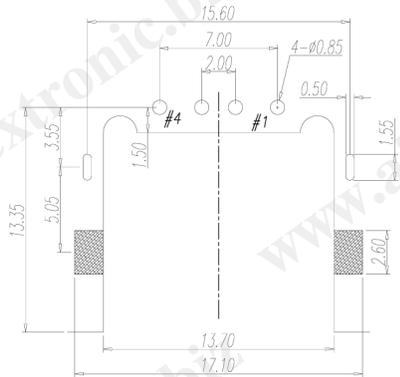


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	USB A插板(母座)	UB1043-11F10-002E




REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		新版正式發行	JXM	2009.07.14

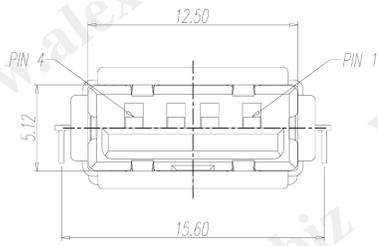

Specifications:

1. Rated Current: 1.5A @ 250V AC
2. Contact resistance: 30mΩ MAX.
3. Insulation resistance: 1000MΩ MIN.
4. Dielectric withstand: 500V AC for 1 minute
5. Operating temperature: -55°C~+85°C
6. Insert force: 35N MAX.
7. Withdraw force: 10N MIN.

Recommend PCB Layout  
(Jack Top View)  
Tolerance:±0.05mm  
Recommend PCB Thickness: 1.2mm

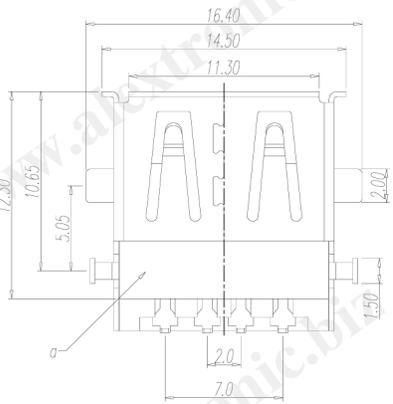

Product Drawing  
ALEXTRONIC

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Shell	1	BRASS, T=0.30mm	Ni Plating	
b	Terminal	4	BRASS, T=0.25mm	Au Plating	
a	Housing	1	PA UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	⊕ ⊖	DWG.NO:
		SIZE: A3	PAGE:1 OF 1	REV:A01	WI-061-507
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2		APPROVED BY		CHECKED BY	PREPARED BY
ANGLES: X :±2° X.X :±1°		WYX		Pengjie	JXM
CUSTOMER COPY					