
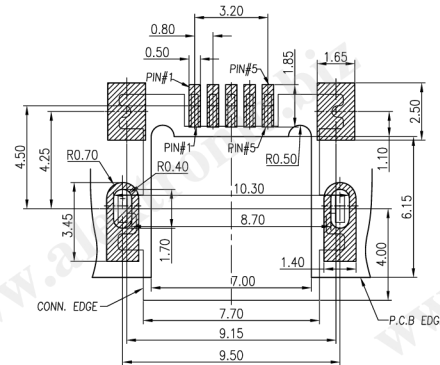





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	MINI USB 5PIN(F) SMT	UB3053-11F10-002C



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		NEW RELEASE	TANGHUI	2009.07.28

SPECIFICATIONS:

- 1.VOLTAGE&CURRENT RATING: AC 5V&1.0A.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V FOR 1 MINUTE.
- 3.INSULATION RESISTANCE: 100 MΩ MIN. AT DC 500V.
- 4.CONTACT RESISTANCE: 50 mΩ MAX.
- 5.CONTACT INSERTION FORCE:35N MAX.
- 6.CONTACT WITHDRAWAL FORCE:3N MIN.
- 7.TEMPERATURE: -20°C TO +85°C.



RECOMMEND P.C.B LAYOUT
(TOP VIEW)(TOLERANCE:±0.05)



d	MYLAR	1	PET,UL94V-0	TRANSPARENT	
c	SHELL	1	BRASS,T=0.4mm	Ni60~100u"PLATING	
b	TERMINAL	5	PHOSPHOR BRONZE,T=0.25mm	Au10u",Ni50u"MIN PLATING	
a	HOUSING	1	LCP UL94V-0	BLACK	
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING & COLOR	REMARK

Product Drawing					
ALEXTRONIC					
UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG:NO:	
		SIZE: A4	PAGE: 10F1	REV:A01	WI-061-555
DECIMALS:	ANGLES:	APPROVED BY		CHECKED BY	PREPARED BY
X :±0.5	X :±2'	WYX		PJ	TANGHUI
X.X :±0.3	X.X :±1'	CUSTOMER COPY			
X.XX :±0.2					