



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Wafer Wire 90° SMT Type	WB002R-XX060-093S

WB002R-XX060-093S
 See Table 1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.07.14

SPECIFICATION

- CURRENT RATING : 3 Amp MAX.
- WITHSTANDING VOLTAGE : AC 1000V MIN.
- INSULATION RESISTANCE: 1000MΩ MIN.
- OPERATING TEMPERATURE : -40° C TO +105° C

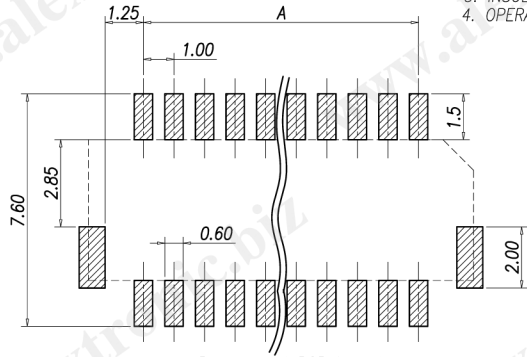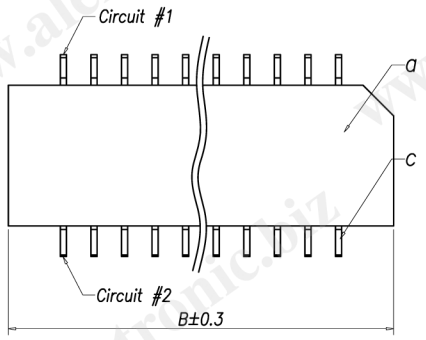

Recommend PCB Layout
 (Jack Top View)
 Tolerance: ±0.05mm


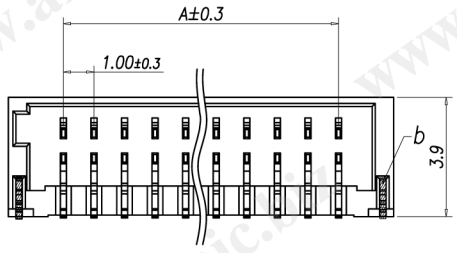


Table 1:
Pin Q'TY & Dimension

Q'TY	Dimension	
	A	B
XX	9.00	12.60
20	14.00	17.60
30	19.00	22.60
40	24.00	27.60

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Terminal	XX	Phosphor Bronze, T=0.2mm	Gold Flash Plating	
b	Solder	2	Phosphor Bronze, T=0.2mm	Matte Tin Plating	
a	Housing	1	PA UL94V-0	White	

See Table 1

Product Drawing
ALEXTRONIC

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	DWG.NO: WI-061-493
	SIZE: A3	PAGE: 1 OF 1	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1°	APPROVED BY	CHECKED BY
		WYX	Pengjie
			Luguan
CUSTOMER COPY			