


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Wafer Wire 90° SMT Type	WB252R-XX060-094S

WB252R-XX060-094S  
See Table 1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.07.13

- SPECIFICATION**
- CURRENT RATING : 3 Amp MAX.
  - WITHSTANDING VOLTAGE : AC 800V MIN.
  - INSULATION RESISTANCE: 1000MQ MIN.
  - OPERATING TEMPERATURE : -40° C TO +105° C

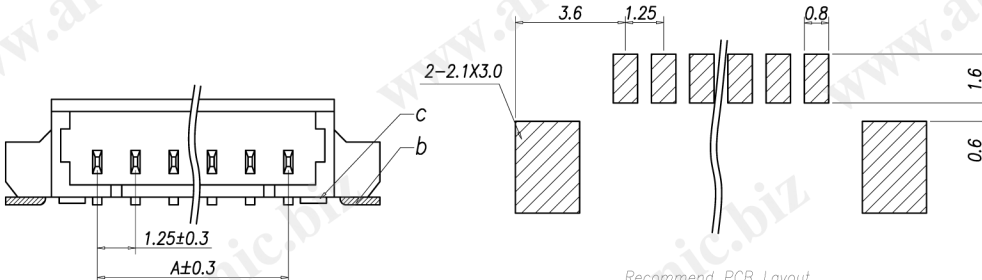

Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm


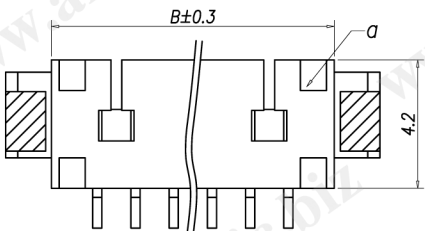


Table 1:  
Pin Q'TY & Dimension

Q'TY	Dimension A	Dimension B
XX		
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Terminal	XX	Phosphor Bronze, T=0.3mm	Matte Tin Plating	
b	Solder	2	Brass, T=0.25mm	Matte Tin Plating	
a	Housing	1	PA UL94V-0	White	

**Product Drawing**  
**ALEXTRONIC**

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	⊕ ⊖	DWG.NO:
	SIZE: A3	PAGE:1 OF 1	REV:A01	WI-061-491
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1'	APPROVED BY	CHECKED BY	PREPARED BY
		WYX	Pengjie	Luguan
<b>CUSTOMER COPY</b>				