

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	2.0 WAFER , 180°	WB4SOV-XX000-0970





PART NO.:
WB4SOV-XX000-0970

Material & Plating
See Table 1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		New Release	Luguan	2009.03.26

SPECIFICATIONS:

1. Voltage Rating: 100V(AC)
2. Current Rating: 3A
3. Insulator resistance: 1000MΩ
4. Withstand Voltage: 800V AC/1min.
5. Operation Temperature: -40°C~+105°C

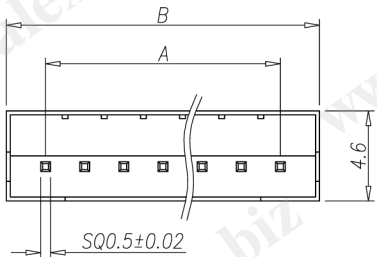

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

Table 1:
Pin Q'TY & Dimension

Q'TY	Dimension	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

See Table 1

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
b	Terminal	X	Brass	Tin Plating	
a	Housing	1	PA66 UL94V-0	White	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE:1 OF 1	REV:R01
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
APPROVED BY	WYX	CHECKED BY	Pengjie	PREPARED BY
				Luguan
CUSTOMER COPY				