

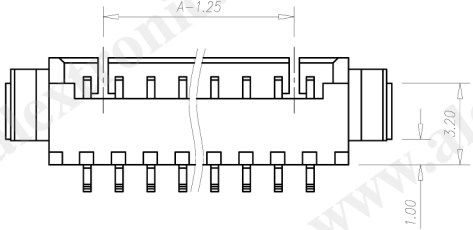
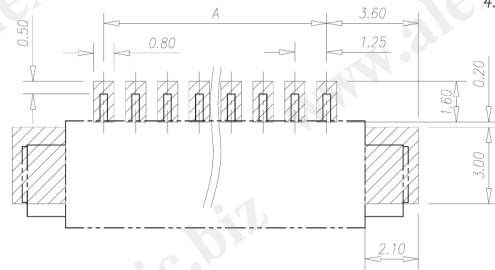


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Wafer Wire 90° SMT Type	WBM03R-XX060-094S


WBM03R-XX060-094S
See Table 1

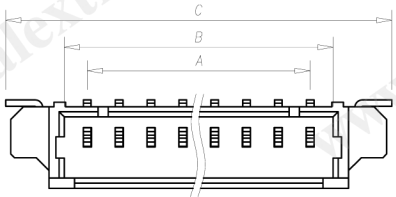

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

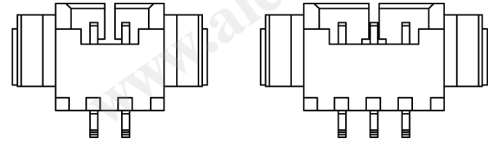

NOTE:
LOCKING WINDOW
ONE PLACE FOR 2P & 3P,
TWO PLACES FOR OTHERS.



- SPECIFICATION**
- CURRENT RATING : 1 Amp MAX.
 - WITHSTANDING VOLTAGE : AC 500V MIN.
 - INSULATION RESISTANCE : 500MΩ MIN.
 - OPERATING TEMPERATURE : -40° C TO +85° C

Table 1:
Pin Q'TY & Dimension

Q'TY	Dimension		
	A	B	C
XX			
02	1.25	3.05	7.65
03	2.50	4.30	8.90
04	3.75	5.55	10.15
05	5.00	6.80	11.40
06	6.25	8.05	12.65
07	7.50	9.30	13.90
08	8.75	10.55	15.15
09	10.00	11.80	16.40
10	11.25	13.05	17.65
11	12.50	14.30	18.90
12	13.75	15.55	20.15
13	15.00	16.80	21.40
14	16.25	18.05	22.65
15	17.50	19.30	23.90
16	18.75	20.55	25.15
17	20.00	21.80	26.40
18	21.25	23.05	27.65
19	22.50	24.30	27.65
20	23.75	25.55	30.15

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Terminal	XX	Brass, T=0.3mm	Tin Plating	
b	Solder	2	Brass, T=0.25mm	Tin Plating	
a	Housing	1	High Temperature Plastic, UI94V-0	White	

See Table 1

Product Drawing
ALEXTRONIC

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG:NO:
	SIZE: A3	PAGE:1 OF 1	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1'	APPROVED BY	CHECKED BY
		WYX	Pengjie
			Luguan
CUSTOMER COPY			