
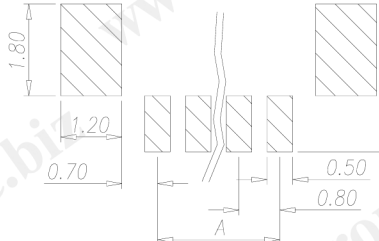




CATEGORY	DESCRIPTION	P/N #
CONNECTOR	0.8 WAFER , 180°, SMT	WBV04V-XX060-092S

PART NO.:
WBV04V-XX060-092S
Material & Plating
See Table 1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	Luguan	2009.08.26



Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

- SPECIFICATION
- CURRENT RATING : 3 Amp MAX.
 - WITHSTANDING VOLTAGE : AC 800V MIN.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATING TEMPERATURE : -40° C TO +105° C

Table 1:
Pin Q'TY & Dimension

Q'TY	Dimension	
	A	B
XX		
02	0.80	3.80
04	2.40	5.40
06	4.00	7.00
07	4.80	7.80
08	5.60	8.60
09	6.40	9.40
10	7.20	10.20
12	8.80	11.80
14	10.40	13.40
15	11.20	14.20
16	12.00	15.00
17	12.80	15.80
20	15.20	18.20

Product Drawing
ALEXTRONIC

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
C	Terminal	XX	Brass, T=0.15mm	Matte Tin Plating	
b	Peg	2	Brass, T=0.2mm	Matte Tin Plating	
a	Housing	1	PA UL94V-0	White	

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE: 1/1 UNIT: mm

SIZE: A3 PAGE: 1 OF 1

REVISION: A01

DWG.NO: WI-061-662

APPROVED BY: WYX

CHECKED BY: Pengjie

PREPARED BY: Luguan

CUSTOMER COPY

See Table 1