
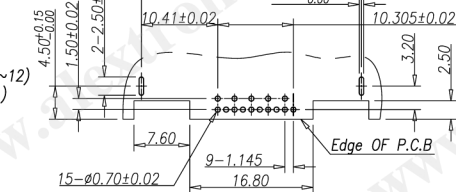


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SLIM D-SUB 15P plus 1.50 mm CORRECT	DBB15F-1BCLX-BXXX




料號DBB15F-1BCL0-BXXX變為DBB15F-1BCLX-BXXX

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		New Release	GMC	2009.08.11
A01	ECN090926002	增加噴碼及尺寸,變更料號及長端結構,取消CAP	Luguan	2009.09.26

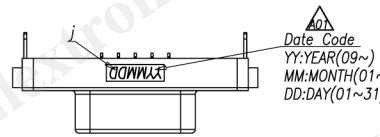

- SPECIFICATIONS
- CONTACT CURRENT RATING:3 Amperes.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 1000/60sec.r.m.s.
 - INSULATION RESISTANCE:5000 Medohms MIN.AT DC 500V.
 - CONTACT RESISTANCE:25 milliohms MAX.
 - TEMPERATURE:-55°C TO +105°C.
 - GROUNDING SCREW TORQUE:3Kg MIN.
 - SOLDER HEAT RESISTANCE:WAVE SOLDERING 260" 10sec.
 - TO CONFORM TO THE "SONY" DIRECTIVE.
 - GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**

Recommend PCB Layout
PCB Thickness:1.20mm.
PCB Layout Tolerance:±0.05mm.


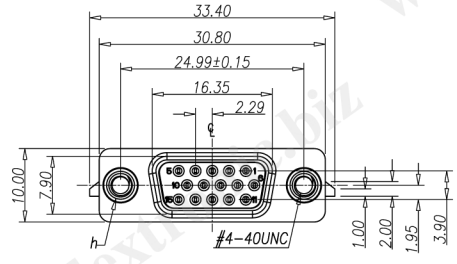


CONTACT PLATING

Table 1	X	CONTACT PLATING
	X	Gold Flash
	X	5u" Au Plating
	X	10u" Au Plating
	X	15u" Au Plating
	X	30u" Au Plating

SCREW

X	SCREW ATTACH WAY
1	WITHOUT SCREW,RIVET With pb/cd≤4wt%
2	ATTACH SCREW,RIVET SCREW With pb/cd≤4wt%
3	LOCK SCREW,RIVET SCREW With pb/cd≤4wt%
4	WITHOUT SCREW,RIVET With pb/cd≤0.2wt%
5	ATTACH SCREW,RIVET SCREW With pb/cd≤0.2wt%
6	LOCK SCREW,RIVET SCREW With pb/cd≤0.2wt%

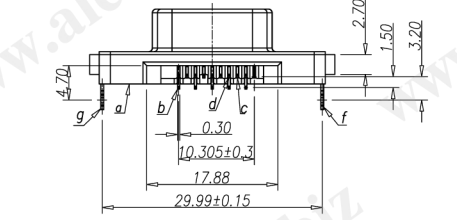

PACKAGE

X	PACKAGE Way
R	REEL PACKAGE
T	TRAY PACKAGE

j	Ink	1	Domino IR-270BK & MC-270BK	Black	
i	SCREW	2	Copper Alloy	Ni Plating	
h	SLIM RIVET	2	Copper Alloy	Ni Plating	
g	SLIM LEFT BOARD LOCK	1	Brass,T=0.3mm	Tin Plating	
f	SLIM RIGHT BOARD LOCK	1	Brass,T=0.3mm	Tin Plating	
e	SLIM SHELL	1	SPCC,T=0.4mm	Ni Plating	
d	SLIM SHORT CONTACT	5	Phoshor Bronze,T=0.3mm	See Table 1	
c	SLIM CENTER CONTACT	5	Phoshor Bronze,T=0.3mm	See Table 1	
b	SLIM LONG CONTACT	5	Phoshor Bronze,T=0.3mm	See Table 1	
a	SLIM CORRECT HOUSING	1	LCP UL94V-0	Black	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

Product Drawing
TERAPRO

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE:1/1 UNIT: mm DWG.NO: Wl-061-639

SIZE: A3 PAGE:1 OF 1 REV:A01

APPROVED BY	CHECKED BY	PREPARED BY
WYX	Pengjie	Luguan

CUSTOMER COPY